


ESL2 SERIES MINI BRUSHLESS, SHUT-OFF CLUTCH



.01-.34 Nm
.07-3.1 in.lb

The Delta Regis ESL2 Series Miniature Shut-Off Screwdriver provides excellent low torque repeatability in a small package for precise installation of small screws. The screwdriver's brushless 12VDC motor ensures durability and low maintenance. Each tool includes a 2m cable for connecting to the required BECT200 Controller.

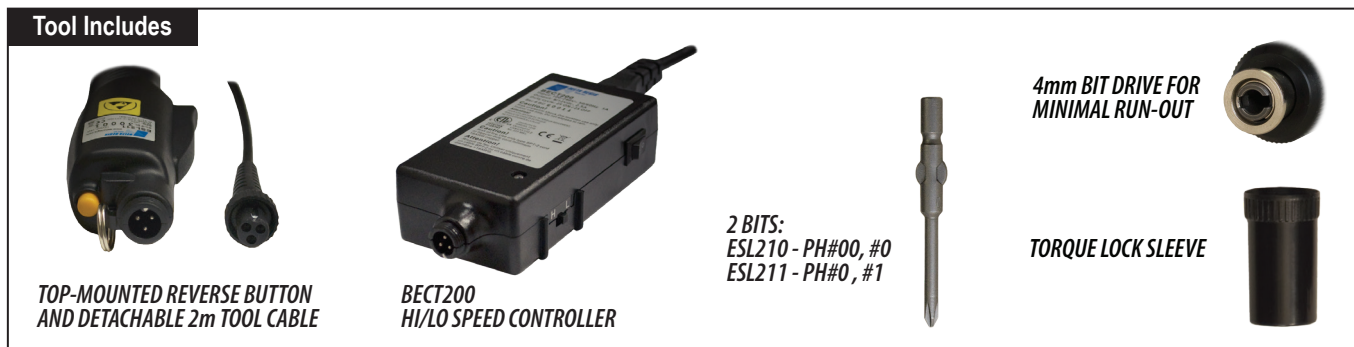

Features

- Compact size designed for installing miniature fasteners. Ideal for assembly of cell phones and other small electronics
- Precise shut-off clutch provides excellent repeatability
- Torque range of 0.07 - 3.08 in-lbs (0.01 - 0.34 Nm)
- Low RPM models available for slow-speed applications
- ESD safe tool housing is standard (non-ESD available)
- Lever start, top-mounted reverse button
- 12VDC brushless motor requires no maintenance
- Bit holder accepts 4mm round winged bits (2 included)
- Tool and controller are CE/RoHS compliant; Controller is ETL approved



12VDC Brushless Screwdrivers & Controllers

Model No. with Controller ^(1,2)	Range In.Lbs	Range Nm	Speed (RPM) Hi / Lo
ESL210-ESD / BECT200	0.07 - 1.32	0.01 - 0.147	1000 / 700
ESL210S-ESD / BECT200	0.07 - 1.32	0.01 - 0.147	280 / 200
ESL211-ESD / BECT200	0.44 - 3.08	0.05 - 0.343	1000 / 700
ESL211S-ESD / BECT200	0.44 - 3.08	0.05 - 0.343	280 / 200

Dimensions (mm): 165 (L) x 23 (dia) / (in): 6.5 (L) x 0.9 (dia) **Weight:** 170g / 0.4lbs

⁽¹⁾ Screwdriver and Controller are packaged and sold as a set. Above dimensions are for the screwdriver only.
⁽²⁾ Controller includes standard North American power cord. Add suffix 'E' for EU cord, suffix 'UK' for UK cord.

BECT200 Controller Specifications

Input 100-240VAC, 50/60hz, 1A ; Output 12/9VDC, 30W