



CESL8/9 40VDC BRUSHLESS SCREWDRIVERS

1-12 Nm
9-106 in.lb

Delta Regis 40VDC Premium Brushless Screwdrivers pack the performance to satisfy demanding assembly applications. With torque capabilities to 25 Nm and brushless motor technology that withstands higher duty cycles, these drivers are ready to perform on production lines typically dependent on pneumatic tools. As with all Delta Regis Shut-off Clutch Screwdrivers, excellent torque repeatability is the fundamental building block that defines these models. A host of screwdriver configurations, accessories and control options are available to make the 40VDC Series an ideal choice for production assembly across a wide range of industries.




CESL828/829 drivers have powerful brushless motors to handle demanding applications. Fast versions are available to speed-up production lines that require installation of long fasteners.

CESL8 Handheld Inline Drivers

Model Number ⁽¹⁾	Start Type	Range (In.Lbs)	Range (Nm)	Speed (RPM)	Drive Type
<i>Inline Body Style, Handheld⁽¹⁾</i>					
CESL828	Lever	8.9 - 26.0	0.98 - 2.94	1000	1/4" hex
CESL828F		8.9 - 26.0	0.98 - 2.94	2000	
CESL829		17.4 - 43.4	1.96 - 4.90	1000	
CESL828P	Push	8.9 - 26.0	0.98 - 2.94	1000	1/4" hex
CESL828PF		8.9 - 26.0	0.98 - 2.94	2000	
CESL829P		17.4 - 43.4	1.96 - 4.90	1000	
Dimensions (mm): 278(L) x 39.5(dia)			Weight: 0.8 kg / 1.76lbs		

Tool Includes

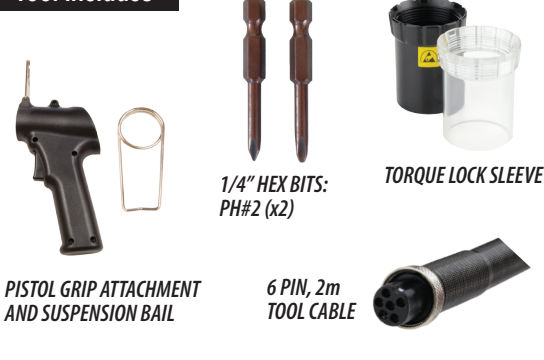

⁽¹⁾ ESD Safe housing available - add suffix '-ESD'



Tool Includes



Delta Regis CESL9 Series Screwdrivers are engineered to perform in tough applications. The slim design and threaded metal front end make it an ideal choice for fixture mount and auto-screwfeed applications. A powerful motor and integrated fan keep the driver running cooler, particularly on soft joint and higher cycle applications. 40VDC Series drivers are capable of developing high torques - side handles are included where suitable. We recommend mounting in a torque reaction arm for ultimate ergonomics and operator safety.

CESL9 Handheld/Fixture Mount

Model Number	Start Type	Range (In. Lbs)	Range (Nm)	Speed (RPM)	Bit Type
CESL935	Lever	18-53	2-6	1000/750	1/4" hex
CESL935F		18-53	2-6	2200/1650	
CESL945		27-79	3-9	1000/750	
CESL955		53-106	6-12	880/660	
CESL935P	Push	18-53	2-6	1000/750	1/4" hex
CESL935PF		18-53	2-6	2200/1650	
CESL945P		27-79	3-9	1000/750	
CESL955P		53-106	6-12	880/660	
Dimensions (mm): 306(L) x 41.4(dia) / (in): 12(L) x 1.6(dia)				Weight: 1.03kg / 2.3lbs	



HIGH TORQUE PREMIUM BRUSHLESS, SHUT-OFF CLUTCH



2-25 Nm
18-221 in.lb



3/8" SQUARE DRIVE
ADD SUFFIX '-SQ'

CESL8_M Series Screwdrivers incorporate an aluminum front collar to facilitate fixture mounting and include an accessory side handle for handheld applications.

CESL8_M Handheld / Fixture Mount					
Model Number ⁽¹⁾	Start Type	Range (In.Lbs)	Range (Nm)	Speed (RPM)	Drive Type
Inline Body Style, Handheld or Fixture Mount					
CESL835M	Lever	18 - 53	2 - 6	1000/750	1/4" hex ⁽²⁾
CESL845M		27 - 79	3 - 9	800/600	
CESL855M		36 - 106	4 - 12	550/400	
CESL855FM		36 - 106	4 - 12	880/660	
CESL865M		53 - 159	6 - 18	350/250	
CESL865FM		53 - 159	6 - 18	600/450	
CESL875M		71 - 221	8 - 25	350/250	
CESL835PM	Push	18 - 53	2 - 6	1000/750	1/4" hex ⁽²⁾
CESL845PM		27 - 29	3 - 9	800/600	
CESL855PM		36 - 106	4 - 12	550/400	
CESL855PFM		36 - 106	4 - 12	880/660	
CESL865PM		53 - 159	6 - 18	350/250	
CESL865PFM		53 - 159	6 - 18	600/450	
CESL875PM		71 - 221	8 - 25	350/250	
Dimensions (mm): 297(L) x 46.2(dia) / (in): 11.7 (L) x 1.81 (dia) Weight: 1.25 kg / 2.75lbs (CESL875, 1.45kg / 3.2lbs)					

⁽¹⁾ ESD Safe housing available - add suffix '-ESD'


⁽²⁾ 3/8" Square Drive Available - add suffix '-SQ'



CESP8 Brushless Pistol Grip Drivers						
Model Number ⁽¹⁾	Start Type	Range (In.Lbs)	Range (Nm)	Speed (RPM)	Drive Type	
Pistol Grip Body Style						
CESP835	Trigger	18 - 53	2 - 6	1000/750	1/4" hex	
CESP835-SQ		18 - 53	2 - 6	1000/750	3/8" square	
CESP845		27 - 79	3 - 9	800/600	1/4" hex	
CESP845-SQ		27 - 79	3 - 9	800/600	3/8" square	
CESP855		36 - 106	4 - 12	550/400	1/4" hex	
CESP855-SQ		36 - 106	4 - 12	550/400	3/8" square	
CESP865		53 - 159	6 - 18	350/250	1/4" hex	
CESP865-SQ		53 - 159	6 - 18	350/250	3/8" square	
Dimensions (mm): 270(L) x 169(H) x 48(dia) Weight: 1.2 kg / 2.64lbs						

⁽¹⁾ Pistol Grip tool has cable connection in bottom of handle as standard. For top rear connection, add suffix 'U' to model number.

⁽¹⁾ ESD Safe housing available - add suffix '-ESD'

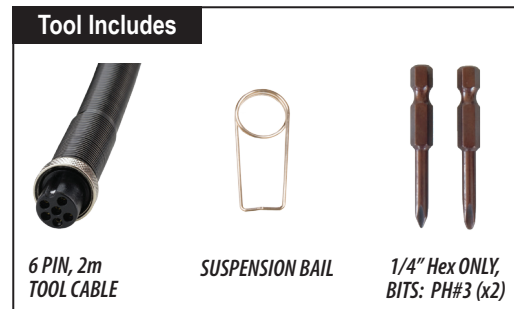

CESP8 Pistol Grip tools come standard with the cable connection at the bottom of the handle - top rear cable connection is optional.